


S-400 vertical labeling machine(with shield)



Device description

- Applicable to all kinds of schering bottles, bottle of syrup and other round bottles of vertical labeling, equipped with CCD visual identification system and leak detection to eliminate system.
- Adopts rotary feeding method, artificial feeding or connection to use.
- Use imported well-known brand servo motor, the speed, high precision and good stability.
- Use rubber wheel differential separation mechanism, can be stepless speed regulation, separated into any spacing, change without changing the product specifications.
- Roll wheel attached to the bottle, label stickup and firm, rapid and convenient adjustment.

Contrivance Feature

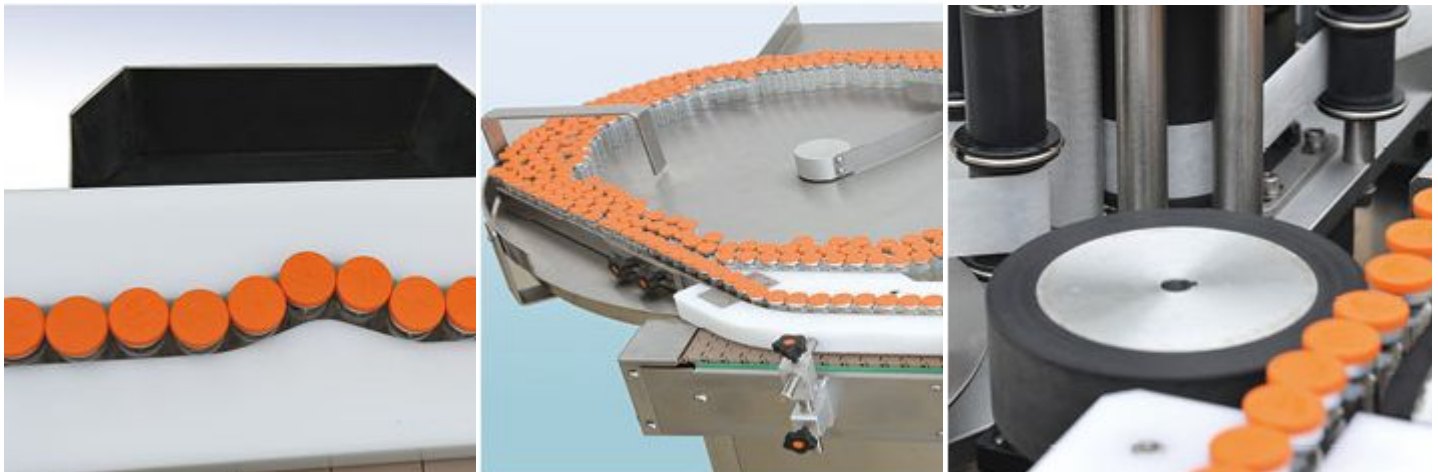

- U-shaped channel out bottles
- Special design of the u-shaped channel to eliminate bottle, ensure the continuity of the equipment operation, improve the production efficiency.
- Rotating disc feeder
- Smooth, smooth and buffer space is large.
- Rubber wheel points bottles of institutions
- Differential point bottles, replace the specification convenient and fast.



The bottle diameter	Labeling speed	Labeling accuracy	The length of the label	The total power	Electrical source	Gas source	Overall dimensions	The total weight
16-85mm	0-400 Bottle/min	±1mm	25-200mm	1.5KW	220V,50Hz	0.5MPa	2710*1325*1390 mm (L*W*H)	280kg

